


AA016 Sensor cable M8 4P PVC 5m IP69K

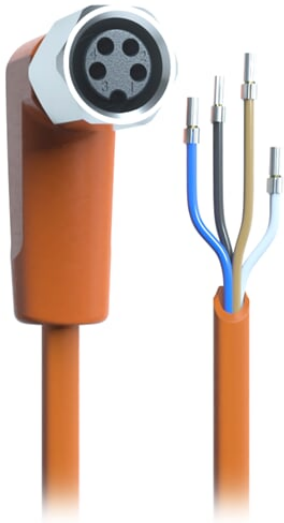

Order by 2 pm - Shipping on the same working day

13,03 € offline price 13,79 €

Incl. 5.5% online discount for online orders

Overview


- vibration-proof locking principle with end stop
- also suitable for use in the food industry and hygienic & wet zones
- Innovative sealing concept for optimum protection against oils & moisture
- halogen-free
- AC/DC

www.autosen.com/AA016


Direct link to the article on autosen.com

In daily use - proven millions of times over. Products from autosen are under highest quality requirements regarding robustness, insensitivity and reliability. We offer 5 years warranty - with money-back guarantee!

Dimensional drawing

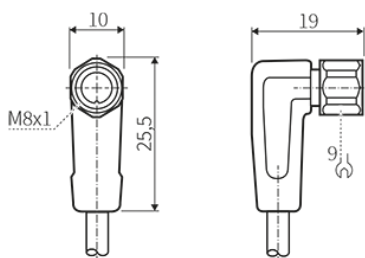

Connection & pin assignment

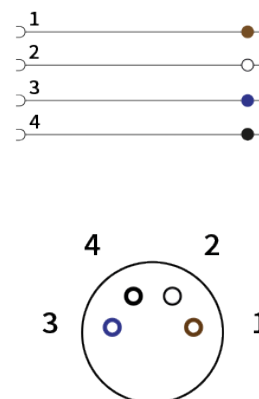

General information

Range of application	Sensor cables for wet areas and the food industry
Function display	No
Number of wires	4
Design of plug connection	Angled M8 Open cable 4-pin Contacts gold-plated
Cable length	5 m

Electrical data

Operating voltage	60 V DC 50 V AC
Voltage type	Direct voltage (DC) Alternating voltage (AC)
Current carrying capacity max.	3000mA
Protection class	III

Mechanical data

Union nut tightening torque	0.3 ... 0.5 Nm
Material of grip body	PVC
Material of union nut	V4A (1.4401)
Colour of grip body	Orange
Colour of cable sheath	Orange
Material of seal	EPDM
Material of cable sheath	PVC cable

Ambient conditions

Ambient temperature min.	-25°C
Ambient temperature max.	80°C
Protection rating	IP65 IP67 IP68 IP69k

Suitability for drag chains

Suitability for drag chains	Yes
Bending radius for flexible applications	At least 10 x cable diameter
Torsion stress	± 180 °/m
Bending cycles	5 million
Travel speed	Max. 3.3 m/s with 5 m horizontal travel length and max. acceleration of 5 m/s ²

Order online at
Order by telephone
Order by fax

www.autosen.com
+49 (0) 201/749 189 21
+49 (0) 201/749 189 22

autosen gmbh • Annastraße 41 • 45130 Essen
www.autosen.com • info@autosen.com
We reserve the right to make technical changes without notice -
3/31/2025



Additional information

Electrical connection	PVC cable halogen-free 4 x 0.34 mm ² (42 x Ø 0.1 mm) Ø 4.9 mm
Approval	CE cURus

