

AA073 Sensor cable M8 4P PVC 5m IP67



Order by 2 pm - Shipping on the same working day

6,61 €

offline price
~~6,99 €~~

Incl. 5.5% online discount for online orders

Overview

- Low-cost sensor cable for small budgets
- Range of applications: Machine workshops & protected industrial environments
- Vibration-proof locking principle
- Crimped wire-end ferrules - ready to connect
- Silicone-free
- AC/DC


In daily use - proven millions of times over. Products from autosen are under highest quality requirements regarding robustness, insensitivity and reliability.

We offer 5 years warranty - with money-back guarantee!


www.autosen.com/AA073

Direct link to the article on autosen.com

Dimensional drawing

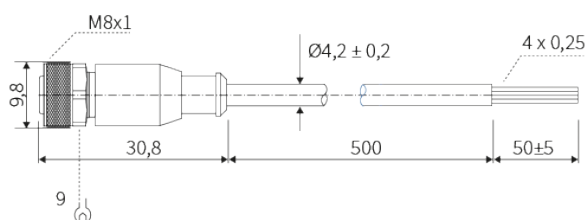

Connection & pin assignment



General information

Function display	No
Number of wires	4
Design of plug connection	Straight M8 Open cable 4-pin Contacts gold-plated
Cable length	5 m

Electrical data

Operating voltage	60 V DC 60 V AC
Voltage type	Direct voltage (DC) Alternating voltage (AC)
Current carrying capacity max.	3000mA

Mechanical data

Union nut tightening torque	0.3 ... 0.5 Nm
Material of grip body	PUR (TPU)
Material of union nut	Nickel-plated brass
Colour of grip body	Black
Colour of cable sheath	Black
Material of seal	Viton
Material of cable sheath	PVC cable

Ambient conditions

Ambient temperature min.	-25°C
Ambient temperature max.	80°C
Protection rating	IP67

Suitability for drag chains

Suitability for drag chains	Yes
Bending radius for flexible applications	15 x cable diameter
Bending cycles	1 million
Travel speed	1 m/s

Additional information

Electrical connection	4 x 0,25 mm ²
Approval	CE

